


**LAFARGE** Technical partner of

**GCC**  
GEORGIAN CEMENT COMPANY

**CEM II/B-L 32.5**

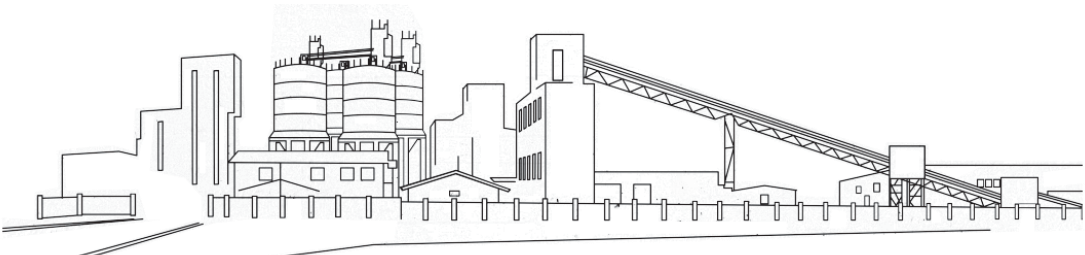

## CEM II/B-L 32.5

### Product use:

- Durable concrete production of a wide range of hardness (B 7,5-B25 class)
  - Arrangement-installation of moderate loading foundation
- arrangement of floors, rigging of floor and ceilings
  - Manufacture of solutions for layer works
- Manufacture of solutions for plastering works
- Conducting a wide range of external and internal works allows us to reduce the timing of the pattern removal, to increase the rotation of the pattern while making small items

### Product's superiority

- Convenience when working with concrete / solutions mixture at the expense of high adhesion and uniformity
- Improved, convenient lay-out, and maintenance of features over time
- Efficient distribution of concrete mixture on the whole range of the pattern
- High adhesion with surfaces while carrying out plastering works, at even low temperatures at the expense of dynamics of quick hardening
- Reduced timing of construction works due to quick hardening of concrete
- Ability of easy distribution of concrete mixture on the whole range of the pattern.
  - The high quality of texture of concrete items
- It does not require extra effort to level the surfaces
  - ecologically pure cement

### Health and security

The chemical composition of the cement is in full compliance with sanitary-epidemiological regimen in terms of harmful substances requiring the quality of the given building material.

When working with cement it is necessary to avoid contact with the eyes and skin, do not inhale dust and use appropriate protective clothing, gloves, eyes and face protectors.

Produced in Georgia