




CEM III/A-5 32.5

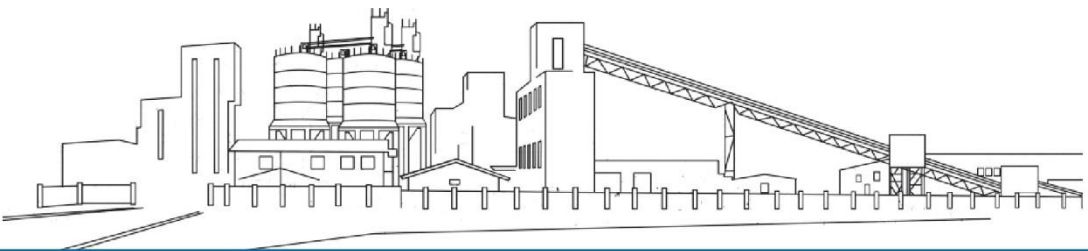

CEM III/A-S 32.5

Intended for high marks of concrete used in work where concrete is in contact with aggressive environment (salinous waters, sulfate-containing waters, in the construction of facilities with high content of chemical elements). Such a special cement should have a feature to resist harmful effects. An active supplement-granulated slag is used for the manufacture of cement, the share of which is more than 35% in cement. It is used for any construction where sulfate resistance, limited hydration temperature is required, and there is the probability of silica-alkali reaction.

Used in:

- marine facilities, shore protection works
- hydrological facilities, HPPs, underground facilities
- molding a large mass of concrete

